


FTP

1. 가 FTP
2. 가
3. 가 가

<http://www.mcse.co.kr> 2000

: (admin@mcse.co.kr)

IIS 5.0 FTP 가 anonymous

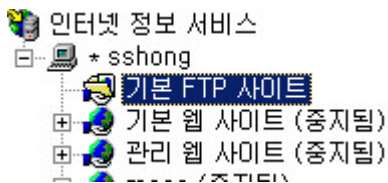

[. IIS 5.0 FTP 가]

```
C:\Documents and Settings\Administrator>ftp localhost
Connected to sshong.co.kr.
220 sshong Microsoft FTP Service (Version 5.0).
User (sshong.co.kr:(none)): anonymous
331 Anonymous access allowed, send identity (e-mail name) as password.
Password:
230 Anonymous user logged in.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
226 Transfer complete.
ftp>
```

[. FTP anonymous]

anonymous


FTP

.()

```
C:\Documents and Settings\Administrator>ftp localhost
Connected to sshong.co.kr.
220 sshong Microsoft FTP Service (Version 5.0).
User (sshong.co.kr:(none)): admin
331 Password required for admin.
Password:
230 User admin logged in.
ftp>
```

[. FTP]

가 FTP

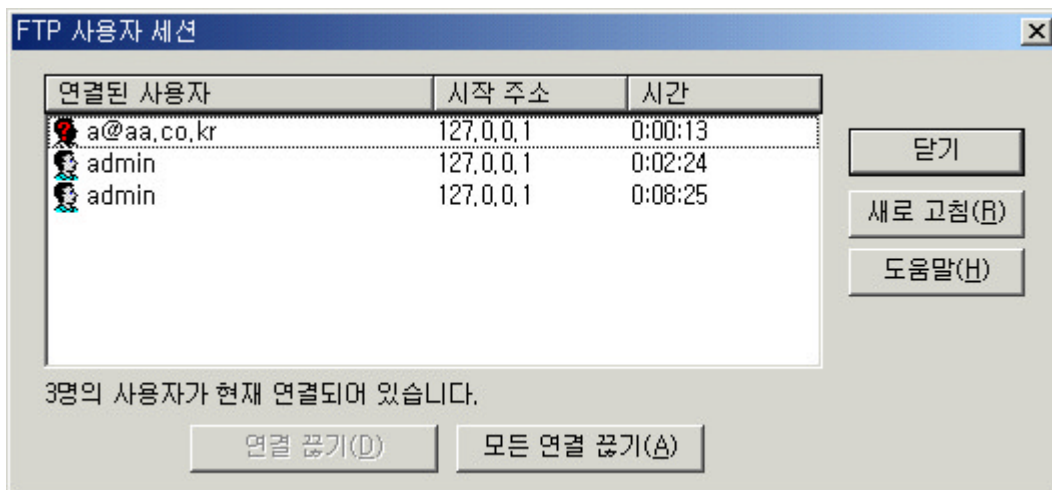


[. FTP]

가

가


NTFS

가

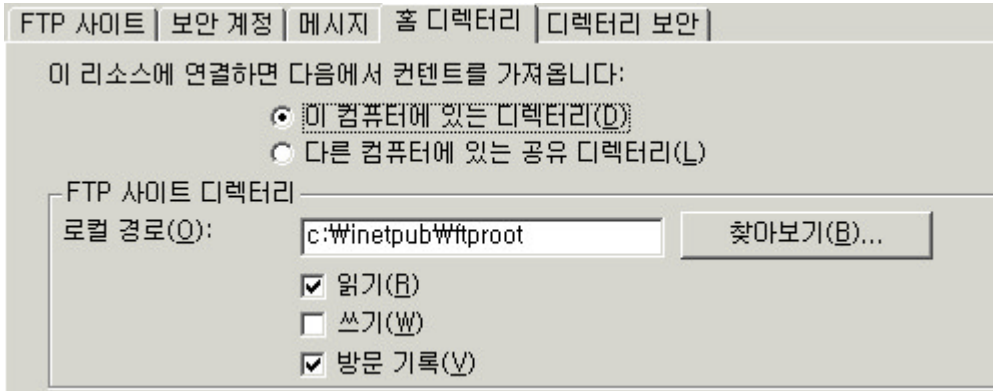

FTP

anonymous

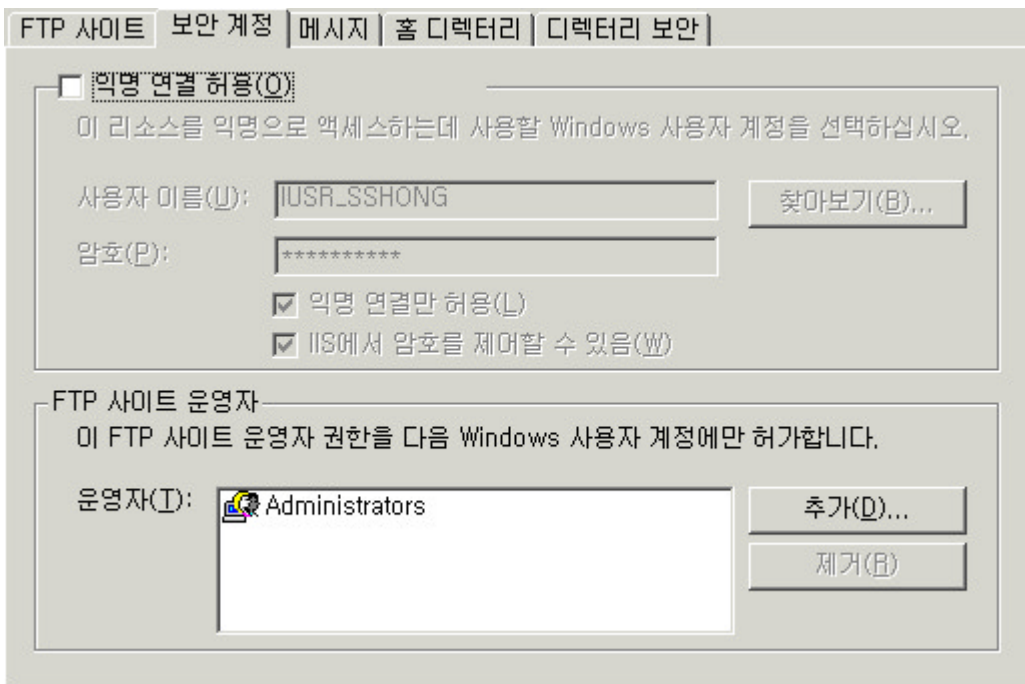

[. FTP]

anonymous

가 ,

가


```
C:\Documents and Settings\Administrator>ftp localhost
Connected to sshong.co.kr.
220 sshong Microsoft FTP Service (Version 5.0).
User (sshong.co.kr:(none)): anonymous
331 Password required for anonymous.
Password:
530 User anonymous cannot log in.
Login failed.
ftp>
```

[. FTP]

- 가 IIS FTP
- 가 FTP IP
- 가 FTP IP
- NTFS
- (OS)

2000

1. 2000 가
2. ftproot




```

C:\Documents and Settings\Administrator>ftp localhost
Connected to sshong.co.kr.
220 sshong Microsoft FTP Service (Version 5.0).
User (sshong.co.kr:(none)): admin
331 Password required for admin.
Password:
230 User admin logged in.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
07-20-01 12:18AM          0  사본 - 새 텍스트 문서.txt
07-20-01 12:18AM          0  새 텍스트 문서.txt
226 Transfer complete.
ftp: 125 bytes received in 0.00Seconds 125000.00Kbytes/sec.
ftp> _

```

[. FTP]

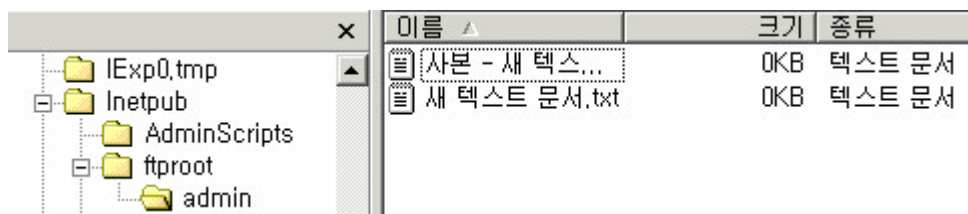

[. Admin]

```

ftp> cd ..
250 CWD command successful.
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
07-20-01 12:18AM      <DIR>          admin
226 Transfer complete.
ftp: 46 bytes received in 0.01Seconds 4.60Kbytes/sec.
ftp>

```

[. Admin]


admin 가 ()
admin 가
(admin 가
)

()
가

```
ftp> dir
200 PORT command successful.
150 Opening ASCII mode data connection for /bin/ls.
07-20-01 12:35AM <DIR> admin
07-20-01 12:43AM <DIR> admin2
07-20-01 12:43AM <DIR> admin3
226 Transfer complete.
ftp: 140 bytes received in 0.01Seconds 14.00Kbytes/sec.
ftp> cd admin3
550 admin3: Access is denied.
```

[FTP]

, 가
1. 가 FTP

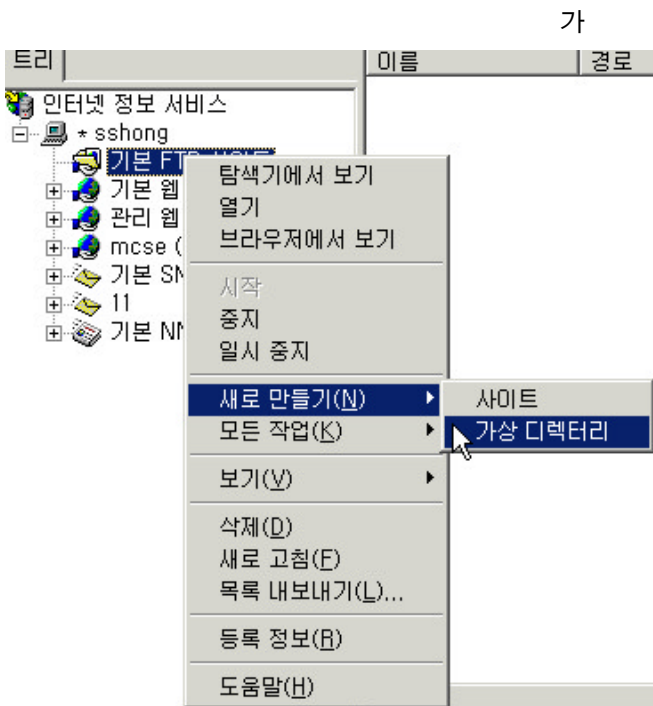

[FTP 가]

2. 가

가상 디렉터리 별칭

참조를 빨리 할 수 있도록, 가상 디렉터리에 약식 이름이나 별칭을 주어야 합니다.

가상 디렉터리에 액세스하는 데 사용할 별칭을 입력하십시오. 디렉터리 이름에 사용한 규칙을 사용하십시오.

별칭(A):

3.

가

FTP 사이트 콘텐츠 디렉터리

FTP 사이트에 게시할 콘텐츠의 위치를 입력하십시오.

콘텐츠가 있는 폴더 경로를 입력하십시오.

경로(P):

4. 가

액세스 권한

이 가상 디렉터리에 설정할 액세스 권한을 선택하십시오.

다음 권한을 허용합니다:


읽기(R)

쓰기(W)

5.


가

가




admin

WWW

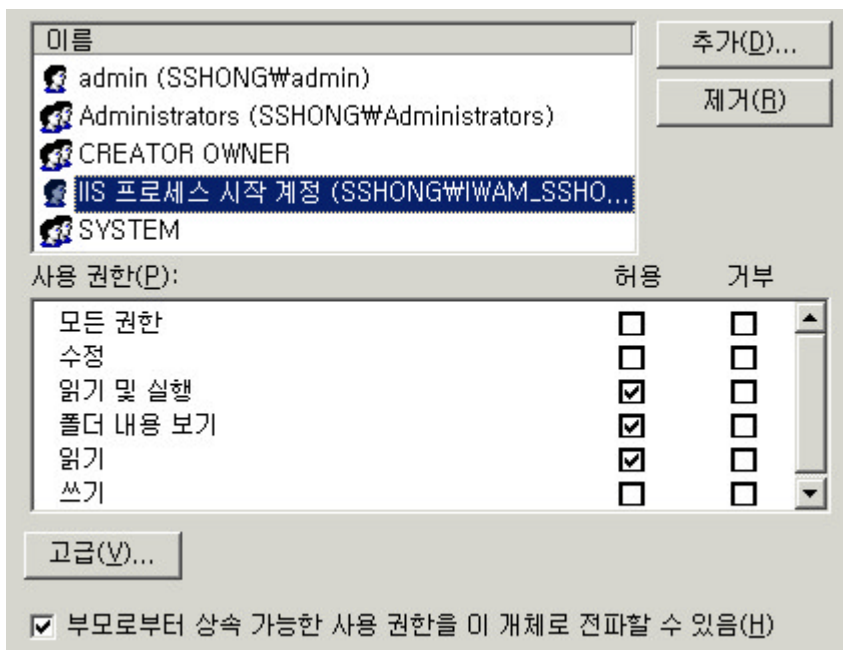

[.WWW]

DOCS

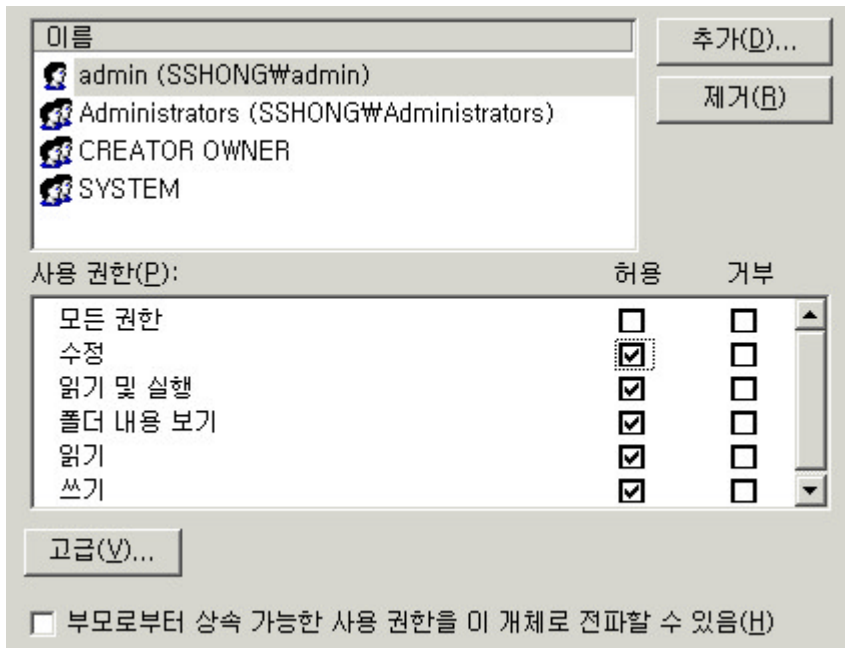

[. DOCS]

가 가

가 가



가